



**Energy**  
National Research Programmes 70 and 71

# Project

Multi-junction solar cells





## Tandem Solar Cells Set New Standards for Efficiency

Researchers at ETH Lausanne (EPFL) and EMPA are on the verge of pushing back the limits of conventional solar technology. They are relying on so-called tandem cells, consisting of two solar cells stacked on top of each other, which use sunlight more efficiently.



Before becoming an ideal addition to any roof, the tandem solar cell developed by Swiss researchers must offer better weather resistance. *Source:* Shutterstock





## At a glance

- Solar cells combining two active layers make better use of light than conventional single-layer cells. As a result, such tandem cells yield more electricity per unit area.
- Swiss researchers combine technically optimized silicon and thin-film cells with the latest perovskite technology to achieve record-high efficiencies.
- The efficiency gain of tandem cells promises lower prices and a higher potential for solar power in Switzerland.

Producing enough solar power for the energy transition is a challenge, especially in a small country such as Switzerland. More efficient solar cells, meaning cells that can convert a greater proportion of incident sunlight into electricity, could make a decisive contribution to this transition. It pays to invest in efficiency: prices for solar cells have fallen steadily over the past few years and now account for only a small part of the costs of a photovoltaic system. A gain in efficiency also translates into a gain in electricity yield despite identical or only slightly higher costs. Against this background, researchers at EPFL and EMPA are jointly developing the next generation of solar cells. In doing so, they hope to contribute to the continuation of the strong upward trend in the efficiency of solar cells.

To achieve this objective, the scientists decided not only to improve existing technology, but also to innovate. Due to the incomplete use of high-energy photons, the efficiency of conventional solar cells is close to the theoretical limit and can only be slightly increased. The amount of electricity these cells harvest from a single photon is fixed. It is equal to the energy a photon requires to overcome the so-called bandgap. Materials with a small bandgap make use of a large portion of the light spectrum, but the excess energy of high-energy photons in the yellow to ultraviolet spectral range is lost. Materials with a wide bandgap have a better yield in this range, but the photons in the red and infrared range are too weak to overcome the bandgap and thus do not yield electricity.

### Bandgap

In solid-state physics, the bandgap is an energy range that cannot be occupied by electrons. The bandgap is a material characteristic of the semiconductors used for solar cells.



## Rethinking the solar cell

According to the scientists, the way out of this dilemma lies in the tandem cell which has two active layers: the first layer, presenting a wide bandgap, absorbs the energy-rich part of the light spectrum while allowing red and lower infrared light to pass through. This residual light is harvested by the second, lower-lying layer thanks to its narrow bandgap. This tandem strategy achieves an efficiency of approximately 30 %, which is significantly higher than the maximum efficiency of about 25 % reached by the single-layer cells currently on the market.

The investigators chose the best representatives of today's photovoltaic generation as the building blocks for their new tandem cell: both the leading silicon cell and the copper indium gallium selenide (chalcogenide) thin-film cell are suitable as the base layer. Both cell types have a narrow bandgap and are therefore inefficient in the high-energy range of the light spectrum. For the second layer of the tandem cell, the researchers chose perovskite, a material that has become very popular in recent years. It is inexpensive, easy to process and can efficiently convert high-energy photons thanks to a variable bandgap.

## Difficult alliance

The elements of the envisioned tandem are already available on the market, albeit as single-layer cells. In order to assemble these, the researchers were forced to make a number of adjustments, but strove to avoid modifying existing industrial production steps, as such process changes easily lead to additional costs.

This approach gave rise to a particular problem: the perovskite cell, i.e. the upper layer of the tandem, must be permeable for a certain range of the light spectrum, which is why the electrode cannot consist of the usual gold coating. EMPA researchers therefore developed materials from metal oxides that are both electrically conductive and transparent, and that allow more than 80 percent of the light in the long-wave range to pass through.


Likewise, the solar cell of the lower layer had to be adapted in order to achieve a high degree of efficiency. To improve the yield in the near-infrared range, for example, EMPA researchers modified the bandgap of the thin-film solar cells.

## Records set by Swiss technology incubators

This tandem, consisting of an optimized thin-film solar cell as the lower layer and a separate perovskite cell placed on top of it, has proven that tandem cells achieve higher efficiencies than conventional single-layer cells. With an efficiency of 22.7 %, the tandem cell is 3.2 percentage points more efficient than either of the two single cells.

Researchers at EPFL are following a slightly different path. Their silicon-perovskite tandem is monolithic, i.e. manufactured in one piece. This process is more economical and reduces the loss of usable light. However, production is complex and the coupling of the two cells is a challenge: To start with, the manufacturing processes of the upper and lower layers must be compatible. In order to avoid excessively high processing temperatures, for example, the researchers are replacing the titanium oxide coating commonly used in perovskite cells with a tin oxide coating. This newly developed coating process works at low temperatures and optimizes the efficiency of the cell.

The fact that industrially produced silicon cells have an etched surface structure consisting of small pyramids caused the scientists quite a headache. The pyramids absorb light more efficiently than a smooth surface, but they are many times larger than the thickness of the entire perovskite cell and cannot be uniformly coated using conventional methods. Instead of simply smoothing the surface, which lessens the optical properties, the researchers invented a new process for applying the perovskite layer. Their perovskite-silicon tandem cell achieves an efficiency of 25.2 % and is the first of its kind worldwide to break the 25 % barrier. During industrial development, the efficiency was even increased to 28 %.

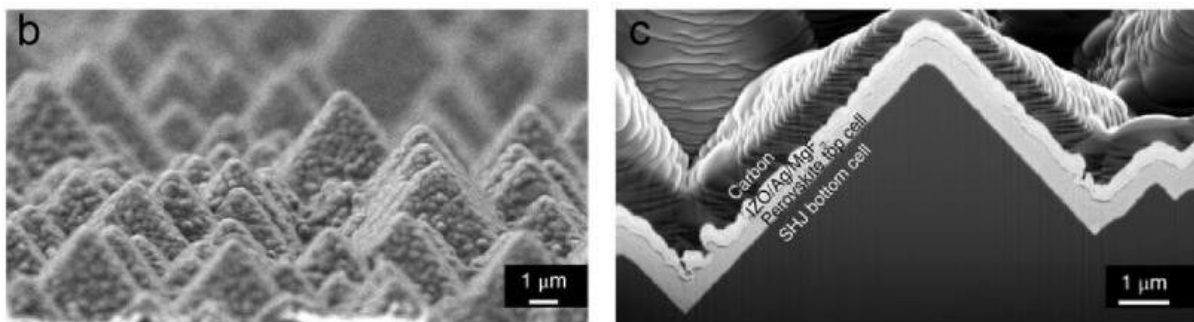

As a result of an innovative process developed in the EPFL laboratories, the perovskite cell covers the pyramid landscape of the silicon surface like an uninterrupted layer of snow.

## Increasing solar energy production through technology



## Energy

National Research Programmes 70 and 71

This success illustrates the great potential of tandem solar cells. Large-scale usage of such highly efficient solar cells would reduce both space requirements and, thanks to low manufacturing costs, the cost of solar power per kilowatt hour. However, to achieve this, tandem cells must be just as durable as established single-layer solar cells. This has not yet been accomplished, as the perovskite cell is much less sturdy than the technically mature silicon and thin-film cells. The researchers are now seeking to improve the durability of the perovskite cell, not only because of its excellent technical prospects, but also to strengthen Switzerland's leading position worldwide in the field of tandem solar cells.



## Produkte aus diesem Projekt

- Tailored lead iodide growth for efficient flexible perovskite solar cells and thin-film tandem devices  
Date of publication: 25.09.19
- Tuning the Optoelectronic Properties of ZnO:Al by Addition of Silica for Light Trapping in High-Efficiency Crystalline Si Solar Cells, in Advanced Materials Interfaces  
Date of publication: 25.09.19
- Controlled growth of PbI<sub>2</sub> nanoplates for rapid preparation of CH<sub>3</sub>NH<sub>3</sub>PbI<sub>3</sub> in planar perovskite solar cells  
Date of publication: 25.09.19
- Mechanosynthesis of the hybrid perovskite CH<sub>3</sub>NH<sub>3</sub>PbI<sub>3</sub>: characterization and the corresponding solar cell efficiency  
Date of publication: 25.09.19
- Highly efficient planar perovskite solar cells through band alignment engineering  
Date of publication: 25.09.19
- Enhanced electronic properties in mesoporous TiO<sub>2</sub> via lithium doping for high-efficiency perovskite solar cells  
Date of publication: 25.09.19
- Entropic stabilization of mixed A-cation ABX<sub>3</sub> metal halide perovskites for high performance perovskite solar cells, in Energy Environ. Sci.  
Date of publication: 25.09.19
- Perovskite Photovoltaics with Outstanding Performance Produced by Chemical Conversion of Bilayer Mesostructured Lead Halide/TiO<sub>2</sub> Films  
Date of publication: 25.09.19
- Room-Temperature Formation of Highly Crystalline Multication Perovskites for Efficient, Low-Cost Solar Cells  
Date of publication: 25.09.19
- Isomer-Pure Bis-PCBM-Assisted Crystal Engineering of Perovskite Solar Cells Showing Excellent Efficiency and Stability  
Date of publication: 25.09.19
- Dopant-free star-shaped hole-transport materials for efficient and stable perovskite solar cells, in Dyes and Pigments  
Date of publication: 25.09.19
- A novel one-step synthesized and dopant-free hole transport material for efficient and stable perovskite solar cells  
Date of publication: 25.09.19
- Incorporation of rubidium cations into perovskite solar cells improves photovoltaic performance  
Date of publication: 25.09.19
- Polymer-templated nucleation and crystal growth of perovskite films for solar cells with efficiency greater than 21 %  
Date of publication: 25.09.19
- Dopant-Free Donor (D)- $\pi$ -D- $\pi$ -D Conjugated Hole-Transport Materials for Efficient and Stable Perovskite Solar Cells  
Date of publication: 25.09.19
- A Novel Dopant- Free Triphenylamine Based Molecular “Butterfly” Hole-Transport Material for Highly Efficient and Stable Perovskite Solar Cells  
Date of publication: 25.09.19



- Boosting the Efficiency of Perovskite Solar Cells with CsBr-Modified Mesoporous TiO<sub>2</sub> Beads as Electron-Selective Contact  
Date of publication: 25.09.19
- Effect of Cs-Incorporated NiO<sub>x</sub> on the Performance of Perovskite Solar Cells  
Date of publication: 25.09.19
- Novel p-dopant toward highly efficient and stable perovskite solar cells  
Date of publication: 25.09.19
- Additives, Hole Transporting Materials and Spectroscopic Methods to Characterize the Properties of Perovskite Films  
Date of publication: 25.09.19
- Over 20 % PCE perovskite solar cells with superior stability achieved by novel and low-cost hole-transporting materials  
Date of publication: 25.09.19
- High-efficiency inverted semi-transparent planar perovskite solar cells in substrate configuration  
Date of publication: 25.09.19
- Progress in thin film CIGS photovoltaics - Research and development, manufacturing, and applications  
Date of publication: 25.09.19
- Flexible NIR-transparent perovskite solar cells for all-thin-film tandem photovoltaic devices  
Date of publication: 25.09.19
- Compositionally Graded Absorber for Efficient and Stable Near-Infrared-Transparent Perovskite Solar Cells  
Date of publication: 25.09.19
- A vacuum flash-assisted solution process for high-efficiency large-area perovskite solar cells  
Date of publication: 25.09.19
- Cesium-containing triple cation perovskite solar cells: improved stability, reproducibility and high efficiency  
Date of publication: 25.09.19
- Highly efficient and stable planar perovskite solar cells by solution-processed tin oxide  
Date of publication: 25.09.19
- Enhanced Efficiency and Stability of Perovskite Solar Cells Through Nd-Doping of Mesoporous TiO<sub>2</sub>  
Date of publication: 25.09.19
- Ionic Liquid Control Crystal Growth to Enhance Planar Perovskite Solar Cells Efficiency  
Date of publication: 25.09.19
- Not All That Glitters Is Gold: Metal-Migration-Induced Degradation in Perovskite Solar Cells  
Date of publication: 25.09.19
- Perovskite/Perovskite/Silicon Monolithic Triple-Junction Solar Cells with a Fully Textured Design  
Date of publication: 25.09.19
- Improved Optics in Monolithic Perovskite/Silicon Tandem Solar Cells with a Nanocrystalline Silicon Recombination Junction  
Date of publication: 25.09.19
- Complex Refractive Indices of Cesium-Formamidinium-Based Mixed-Halide Perovskites with Optical Band Gaps from 1.5 to 1.8 eV  
Date of publication: 25.09.19
- Perovskite/Silicon Tandem Solar





- Efficient luminescent solar cells based on tailored mixed-cation perovskites  
Date of publication: 25.09.19
- High-Efficiency Perovskite Solar Cells Employing a S,N - Heteropentacene-based D-A Hole-Transport Material  
Date of publication: 25.09.19
- High-Efficiency Polycrystalline Thin Film Tandem Solar Cells  
Date of publication: 25.09.19
- Efficient Monolithic Perovskite/Silicon Tandem Solar Cell With Cell Area > 1 cm<sup>2</sup>  
Date of publication: 25.09.19
- Low-temperature-processed efficient semi-transparent planar perovskite solar cells for bifacial and tandem applications  
Date of publication: 25.09.19
- The effect of illumination on the formation of metal halide perovskite films  
Date of publication: 25.09.19
- Cells: Marriage of Convenience or True Love Story? - An Overview  
Date of publication: 25.09.19
- Fully textured monolithic perovskite/silicon tandem solar cells with 25.2 % power conversion efficiency  
Date of publication: 25.09.19
- Single-graded CIGS with narrow bandgap for tandem solar cells  
Date of publication: 25.09.19
- Impact of interlayer application on band bending for improved electron extraction for efficient flexible perovskite mini-modules  
Date of publication: 25.09.19
- Higher efficiency thanks to perovskite magic crystal: Tandem solar cells are simply better  
Date of publication: 25.09.19




## Contact & Team

Prof. Dr. Christophe Ballif  
Photovoltaics and Thin Film Electronics Laboratory  
EPFL  
Rue de la Maladière 71b, CP 526  
MC A2 304 (Bâtiment MC)  
2002 Neuchâtel 2  
  
+41 21 695 43 36  
[christophe.ballif@epfl.ch](mailto:christophe.ballif@epfl.ch)



Christophe Ballif  
Projektleiter



Fan Fu



Aïcha Hessler-Wyser



Quentin Jeangros



Björn Niesen

All information provided on these pages corresponds to the status of knowledge as of 10.05.2019.